

# NUUK

## Technical specification

# TECHNICAL SPECIFICATION



## ALUMINIUM FRAME PROFILE

- Anodized finish
- Painted finish
- Decorative finish

## EXTERIOR / INTERIOR WALL FINISH

- Fabric
- Laminate
- Wood veneer
- Painted board

## VENTILATION FAN

- 180 m<sup>3</sup>/h


## LIGHTING

- Dimmable LED downlights

## POWER OUTLET

- 2 x Schuko
- 2 x USB-A

# DETERMINATION OF AIRBORNE SOUND INSULATION ACCORDING TO ISO 10140-2:2010 IN LABORATORY CONDITIONS

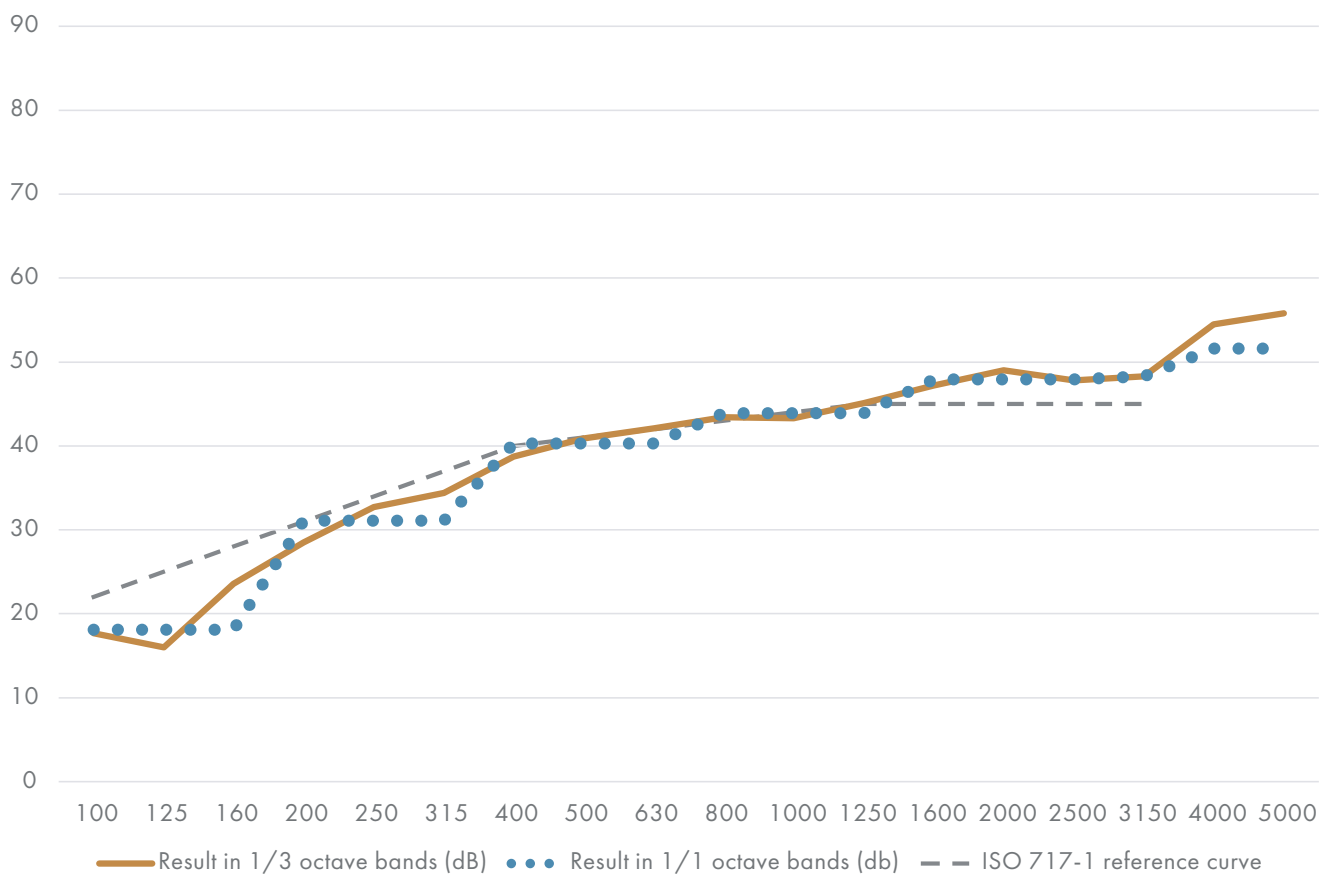

f(Hz)	Result in 1/3 octave bands (dB)	Result in 1/1 octave bands (db)
50	28,3	
63	22,9	15
80	10,5	
100	17,7	
125	16	18,1
160	23,6	
200	28,5	
250	32,7	31,1
315	34,4	
400	38,7	
500	40,9	40,3
630	42,1	
800	43,4	
1000	43,3	43,9
1250	45,1	
1600	47,2	
2000	49	47,9
2500	47,8	
3150	48,3	
4000	54,5	51,6
5000	55,8	

Test performed by the FINAS-accredited (T293) Acoustic Laboratory at the Turku University of Applied Sciences.

Sound reduction index R was measured within 100-5000 Hz according to ISO 10140-2:2010.

Weighted sound reduction index was determined according to ISO 717-1:2013.





Inquiries:  
[info@vallilamarine.com](mailto:info@vallilamarine.com)

Vallila Marine Oy  
Nilsjätkatu 15  
00510 Helsinki, Finland